




GOLDARIUM® SP

F73”T12 / RAPID START or PREHEAT / RDC

Part # 11306 (FDA)

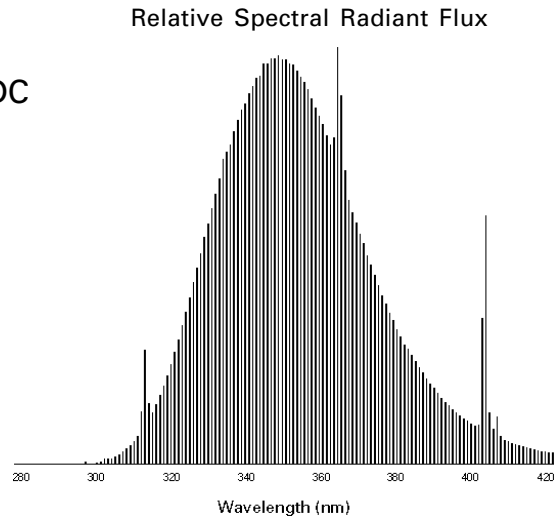

Dimensions		Exposure Times²⁾	
Overall Length (min.)	70.72 inches	Initial Exposure Time (= 0.75 MED)	3 min.
(max.)	70.91 inches	Maximum Exposure Time (= 4 MED)	14 min.
Bulb Diameter (max.)	1.59 inches	T _e	14 min.
Base	RDC/gold	T _m	40 min.
Electrical Data (nominal values)		Recommended Exposure Times	
Lamp Wattage	100 watts	Skin Type II	7 min.
Lamp Current	1.0 amps	Skin Type III	11 min.
Lamp Voltage	118 volts	Skin Type IV	14 min.
Operating Mode	Rapid Start / Preheat	at a typical UVA irradiance of 14.5 mW/cm ²	
Physical Data (typical values)		Compatible to³⁾	
UVB Radiant Flux	1.1 watts	Consult Cosmedico Compatibility listing posted at www.cosmedico.com/north_am/	
UVA Radiant Flux	26.0 watts		
Total UV Radiant Flux	27.1 watts		
UVB/UVA Ratio			
USA (260-320 nm)	4.2 %		
Europe (280-315 nm)	2.1 %		
Recomm. Useful Life	1,000 hours		

¹⁾ Recommended ballast CosmoPower® S 100w (#74135) with Cosmedico starter K11 (#71011) or K12 (#71013).

²⁾ In accordance with the Federal (U.S.) Standard 21 CFR 1040.20 at 14.5 mW/cm² (typical UVA irradiance).

³⁾ Fully documented according to the Federal Standard 'Policy on lamp compatibility'.