





Cosmedico
E 400 R7s
Metal halide lamp for
sun tanning equipment

Typical Relative Spectral Radiant Flux

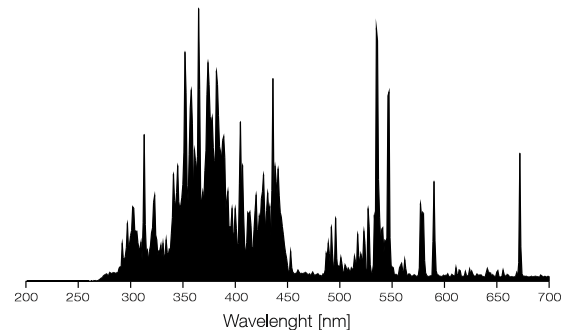


Article-No.	24003
FDA ACC.-No.:	9220059
Total length (A)	106 mm
Lighted length (B)	32 mm
Bulb diameter (C)	Ø 14 mm
Ceramic base	R7s
Bulb (quartz glass)	Ozone free
Lamp voltage $U_{Lp.}$	130 V
Current $I_{Lp.}$	3,5 A
Lamp wattage $P_{Lp.}$ ²⁾	390 VA
Supply voltage	230 V 50 Hz
Starting voltage	3-4,5 kV
Intial phase	3 min.

Dimensions

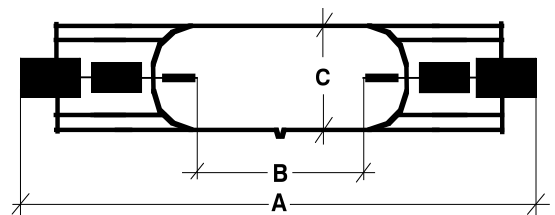

Wiring Diagram

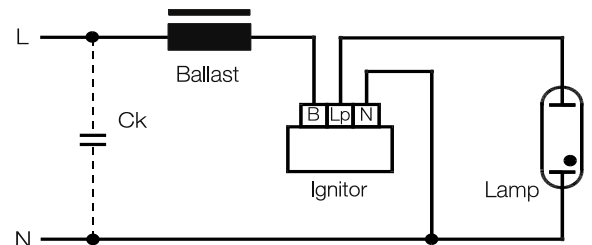

We recommended the ballast Cosmopower S 400W (# 74408) and the ignitor Cosmopower S Z 400 (# 71805).

We recommend to change the lamps if the reduction of intensity is down to 75% of its original output. To avoid failure of the lamps they have to be operated in horizontal position (+/- 30°) with adequate cooling. If the following operating temperatures are exceeded, the lamp may be destroyed:

bulb temperature ≤ 950 EC and ≥ 750 °C
 seal temperature ≤ 350 EC

Remove contaminations (e.g. finger-prints) with 100% alcohol!

Please note!

Follow sunlamp equipment manufactures instructions. Tubular metal halide lamps emit a very intensive UV-radiation. Filter and safety glasses must be used as eyes and skin may be damaged within seconds otherwise.

05.07.2007, Subject to modification