





**Cosmedico**  
**E 500 GY9.5**  
**Metal halide lamp for**  
**sun tanning equipment**

Typical Relative Spectral Radiant Flux

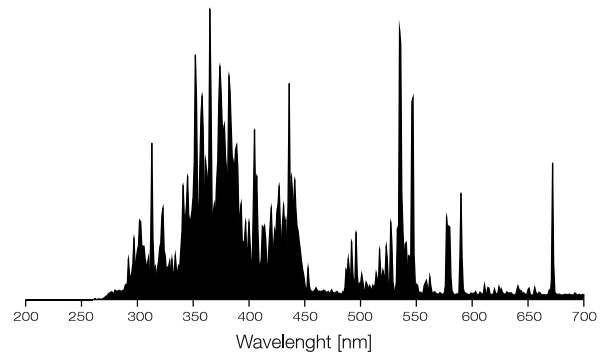

Article-No.	24006
FDA ACC.-No.:	9220059
Total length (A)	110 mm
Lighted length (B)	52 mm
Bulb diameter (C)	Ø 16 mm
Ceramic base	GY9.5
Bulb (quartz glass)	FDA
Lamp voltage $U_{Lp.}$	130 V
Current $I_{Lp.}$	4 A
Lamp wattage $P_{Lp.}$	480 VA
Supply voltage	230 V 50 Hz
Starting voltage	3-4,5 kV
Intial phase	3 min.

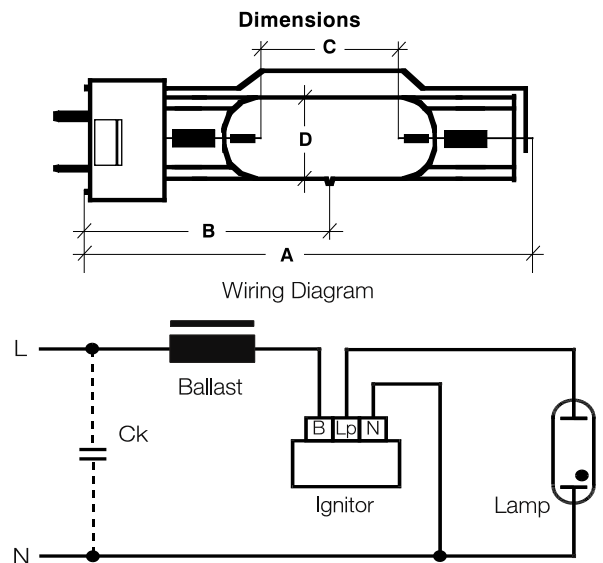

We recommended the ballast Cosmopower S 500W (# 74428) and the ignitor Cosmopower S Z 400 (# 71805).

We recommend to change the lamps if the reduction of intensity is down to 75% of its original output. To avoid failure of the lamps they have to be operated in horizontal position ( $\pm 30^\circ$ ) with adequate cooling. If the following operating temperatures are exceeded, the lamp may be destroyed:

bulb temperature  $\leq 950^\circ\text{C}$  and  $\geq 750^\circ\text{C}$   
 seal temperature  $\leq 350^\circ\text{C}$

Remove contaminations (e.g. finger-prints) with 100% alcohol!

**Please note!**

Follow sunlamp equipment manufactures instructions. Tubular metal halide lamps emit a very intensive UV-radiation. Filter and safety glasses must be used as eyes and skin may be damaged within seconds otherwise.