





**Cosmedico**  
**N 1000 GY9.5**  
**Metal halide lamp for**  
**sun tanning equipment**

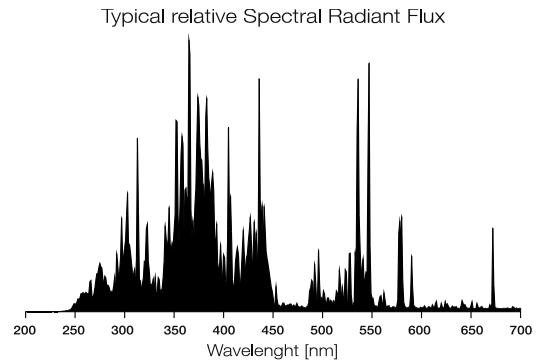

Article-No.	24171
Total length (A)	129 mm
Face to discharge center (B)	74 mm
Lighted length (C)	30 mm
Bulb diameter (D)	Ø 25 mm
Ceramic base	GY9.5
Bulb (quartz glass)	Ozone free
Lamp voltage $U_{Lp.}$	130 V
Current $I_{Lp.}$	8,2 A
Lamp wattage $P_{Lp.}$ <sup>1)</sup>	1000 VA
Supply voltage	230 V 50 Hz
Starting voltage	3-4,5 kV
Intial phase	3 min.

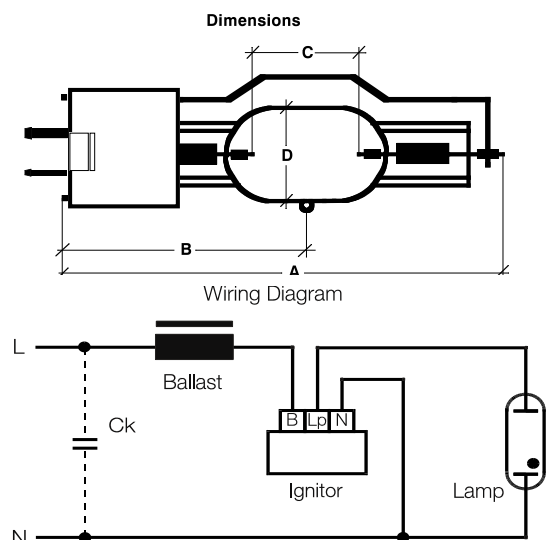

<sup>1)</sup> Recommended ballast Cosmopower S 1000W (# 74412) with ignitor Cosmopower S Z 1000 (# 71813).

The useful life is determined on the operation condition of the lamp (for example type of ballast / ignitor used, on / off cycle, cooling conditions, etc.). We recommend to change the lamps if the reduction of intensity is down to 75% of its original output.

To avoid failure of the lamps they have to be operated in horizontal position (+/- 30°) with adequate cooling. If the following operating temperatures are exceeded, the lamp may be destroyed:

bulb temperature  $\leq 950\text{ }^{\circ}\text{C}$  and  $\geq 750\text{ }^{\circ}\text{C}$

seal temperature  $\leq 350\text{ }^{\circ}\text{C}$

Remove contaminations (e.g. finger-prints) with 100% alcohol!

**Please note!**

Follow sunlamp equipment manufactures instructions. Tubular metal halide lamps emit a very intensive UV-radiation. Filter and safety glasses must be used as eyes and skin may be damaged within seconds otherwise.