






Cosmedico
E 800 R7s
Metal halide lamp for
sun tanning equipment

Typical Relative Spectral Radiant Flux

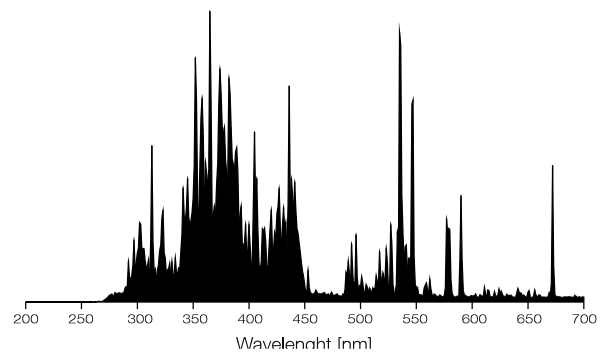

Article-No.	24178
FDA ACC.-No.:	9220059
Total length (A)	≤ 114 mm
Lighted length (C)	35 mm
Bulb diameter (D)	Ø 18,5 mm
Ceramic base	R7s
Bulb (quartz glass)	FDA
Lamp voltage U_{Lp}.	135 V
Current I_{Lp}.	6,5 A
Lamp wattage P_{Lp}.	800 VA
Supply voltage	230 V 50 Hz
Starting voltage	3-4,5 kV
Intial phase	3 min.

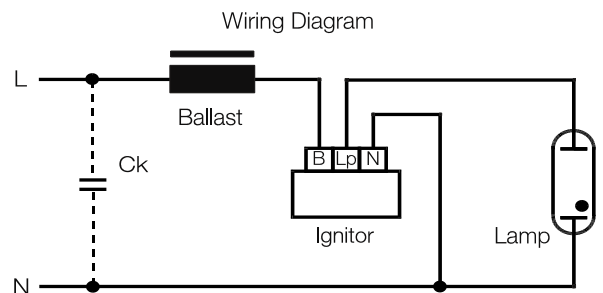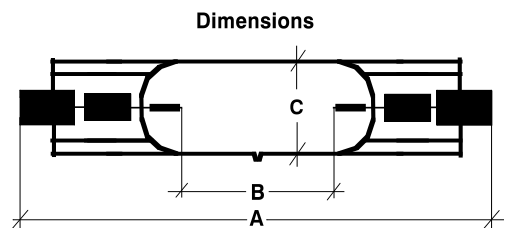

We recommended the ballast ignitor Cosmopower S Z 1000 (# 71813).

We recommend to change the lamps if the reduction of intensity is down to 75% of its original output. To avoid failure of the lamps they have to be operated in horizontal position ($\pm 30^\circ$) with adequate cooling. If the following operating temperatures are exceeded, the lamp may be destroyed:

bulb temperature $\leq 950^\circ\text{C}$ and $\geq 750^\circ\text{C}$
 seal temperature $\leq 350^\circ\text{C}$

Remove contaminations (e.g. finger-prints) with 100% alcohol!

Please note!

Follow sunlamp equipment manufactures instructions. Tubular metal halide lamps emit a very intensive UV-radiation. Filter and safety glasses must be used as eyes and skin may be damaged within seconds otherwise.

07.08.2007, Subject to modification